

**PLASCON MATT EMULSION**

**PRODUCT DESCRIPTION AND USES**

Plascon Matt Emulsion is a top quality copolymer based emulsion paint. Plascon Matt Emulsion gives maximum protection on interior and exterior surfaces and produces a high opacity smooth matt finish without leaving brush marks. It is easy to apply and maintain.

Plascon Matt Emulsion can be used on all types of new and previously painted surfaces i.e. plaster, concrete, building boards, hardboard and bricks Plascon Fungicidal Matt Emulsion is recommended for coastal/high humidity areas to combat mould and algae growth.

**SURFACE PREPARATION**

**New Plaster or Concrete**

For priming apply 1 coat of Acrylic Sealer Undercoat or Plascon Matt Emulsion thinned with water to normal working consistency.

**Previously white washed or distempered walls**

Old coatings of white wash or distemper should be removed by wire brush or scrapping and anything remaining in the pores should be bound using 2 coats of Plascon Plasco Binder or penetrating primer and left to dry for 4 and 16 hours respectively.

Previously painted walls should be sanded down and 2 coats of Plascon Matt Emulsion applied.

**FINISH**

Matt


**APPLICATION**

By brush, roller or spray.

**THINNING AND MIXING**

Thin with tap water to the required consistency.

.../2

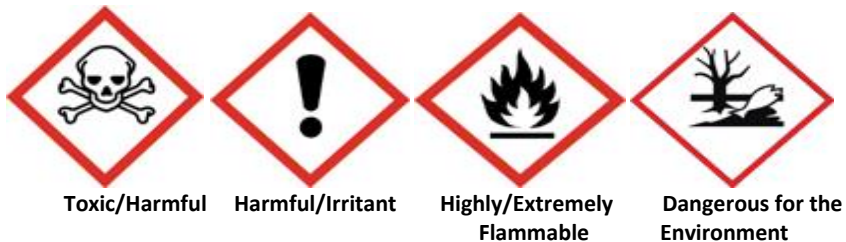

**PLASCON MATT EMULSION**

<b>EQUIPMENT CLEANING</b>	Clean the equipment immediately with water.
<b>DRYING TIME</b>	Re-coatable after 4 hours
<b>COLOUR RANGE</b>	Standard BS 4800 range and Plascon house colours. Available also in Black and White.
<b>SPREADING CAPACITY</b>	11 - 14m <sup>2</sup> per litre at 40 microns DFT.
<b>PACK SIZES</b>	1 litre, 4 Litres and 20 Litres.



Toxic/Harmful



Harmful/Irritant



Highly/Extremely  
Flammable



Dangerous for the  
Environment